
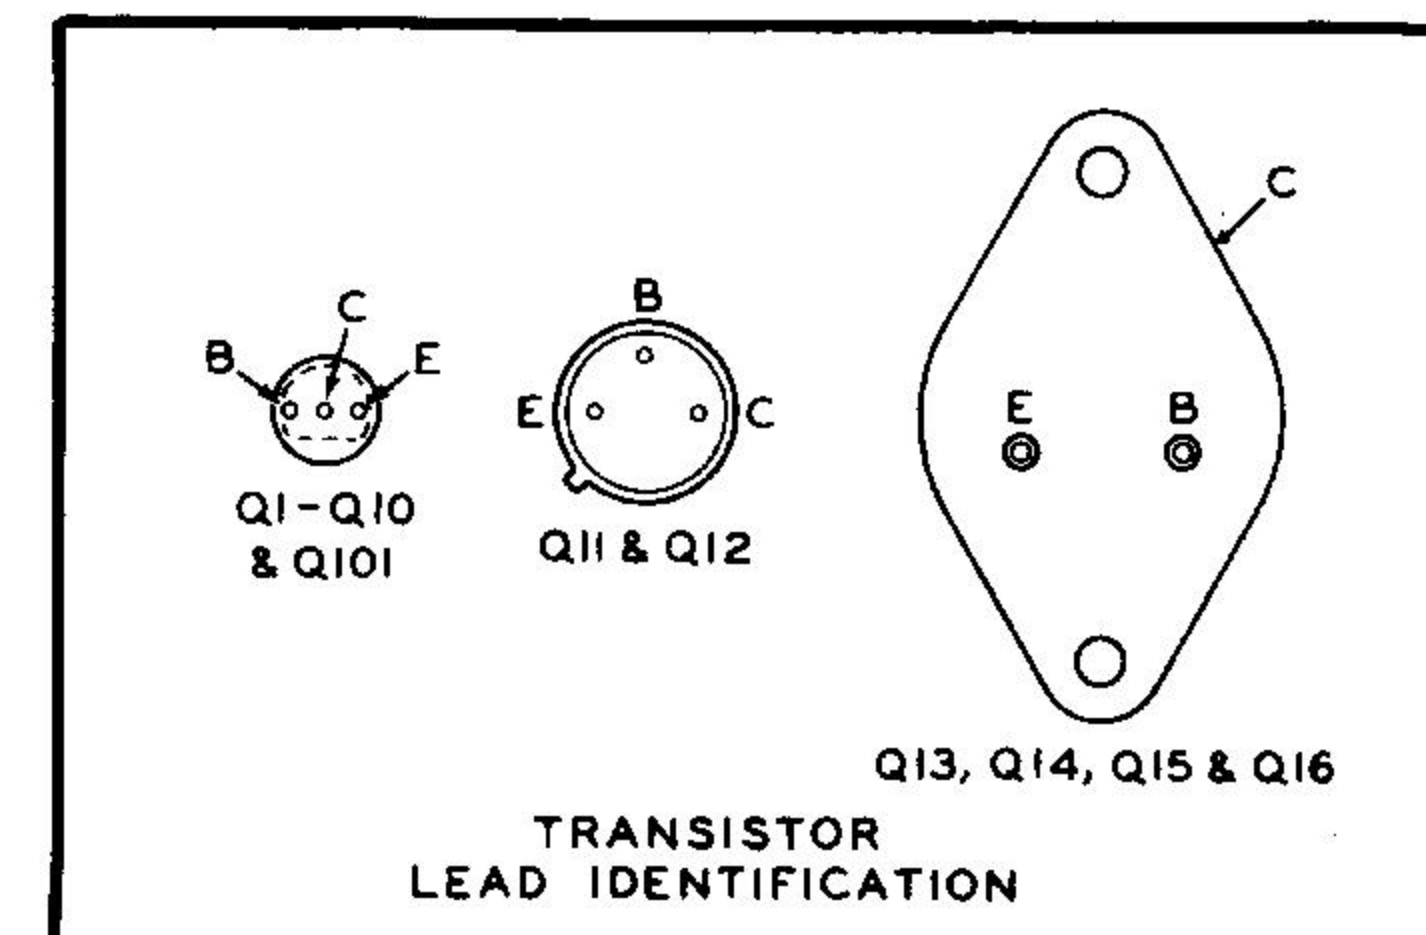


- NOTES:
1. RESISTOR AND CAPACITOR NUMBERS ARE IN THE FOLLOWING GROUPS
 0 - 99 ODD NUMBERS INDICATE LEFT CHANNEL COMPONENTS.
 NUMBERS INDICATE RIGHT CHANNEL COMPONENTS.
 100 - 199 PARTS IN THE POWER SUPPLY.
 2. ALL RESISTORS ARE 1/4 WATT UNLESS MARKED OTHERWISE. RESISTOR ARE IN OHMS (K = 1000, MEG = 1,000,000).
 3. ALL CAPACITOR VALUES ARE IN μF UNLESS MARKED OTHERWISE.
 4. ○ THIS SYMBOL INDICATES A POSITIVE DC VOLTAGE MEASUREMENT WITH AN 11 MEGOHM VTVM, FROM THE POINT INDICATED TO CHASSIS (VOLTAGES MAY VARY ±20%).
 5. □ INDICATES B+ VOLTAGE POINTS.
 6. ◇ INDICATES CONNECTING POINTS ON CIRCUIT BOARD.
 7. SOURCE SWITCH SHOWN IN FULL COUNTERCLOCKWISE POSITION AS VIEW FROM THE FRONT.
 8. REFER TO THE CIRCUIT BOARD X-RAY VIEW FOR THE PHYSICAL LOCATION OF PARTS.
 9. REFER TO THE CIRCUIT BOARD FOIL DRAWING ON THE FOLD-OUT FROM PAGE 38 FOR VOLTAGES AT THEIR PHYSICAL LOCATION.
 10. ↻ INDICATES CW ROTATION.

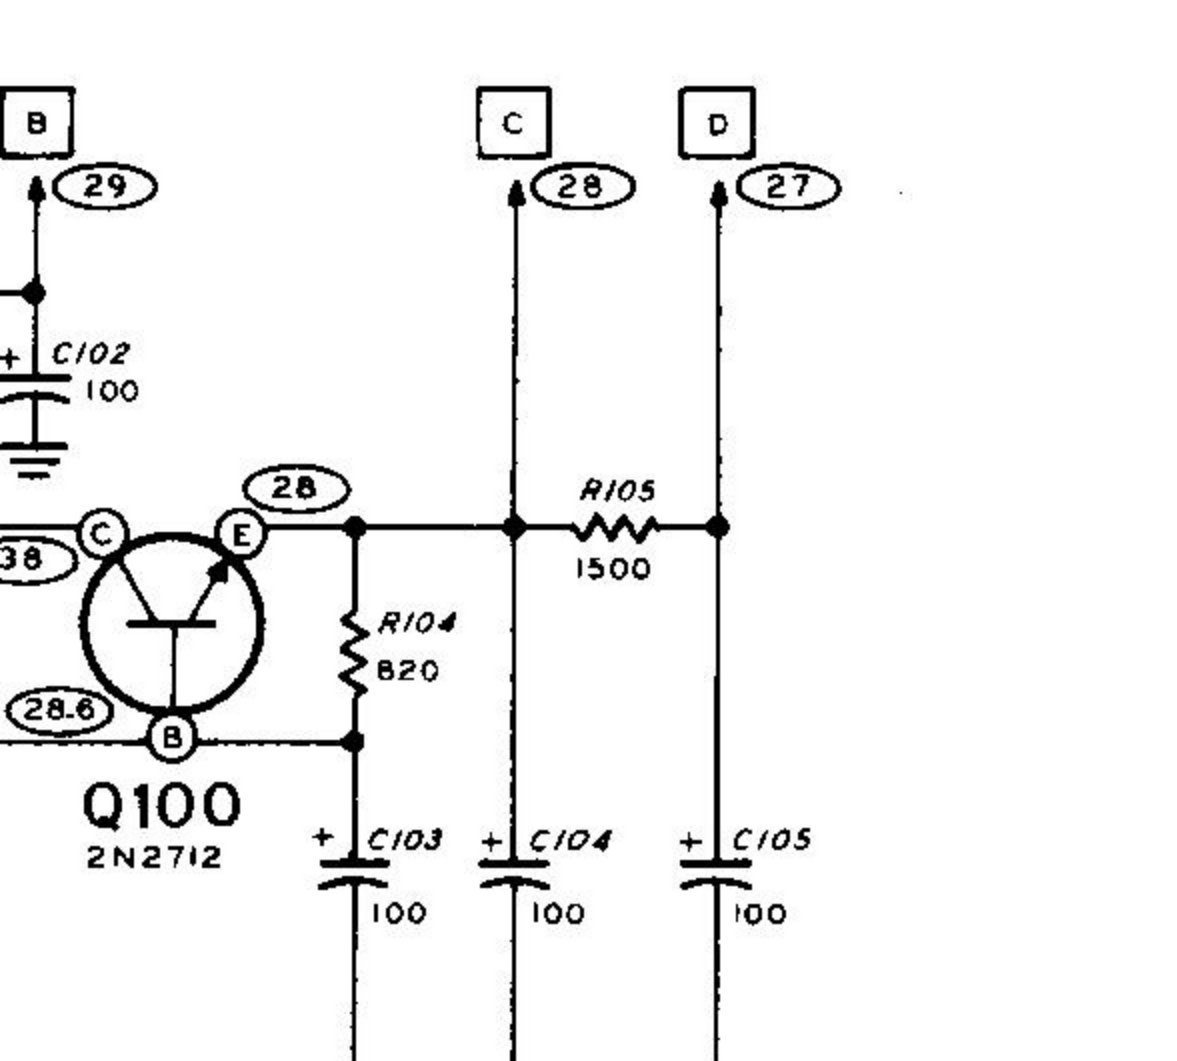

SCHMATIC OF THE
HEATHKIT®
SOLID STATE STEREO AMPLIFIER
MODEL AA-14