


# Heathkit Resistance and Capacitance Bridge

MODEL C-3U



## SPECIFICATIONS

Capacity: 4 ranges:.....	.00001 $\mu$ F - .005 $\mu$ F .001 $\mu$ F - .5 $\mu$ F .1 $\mu$ F - 50 $\mu$ F 20 $\mu$ F - 1000 $\mu$ F
DC Leakage Test Polarising Voltages: 5 ranges .....	5 volts DC 25 volts DC 150 volts DC 250 volts DC 450 volts DC
Power Factor:.....	Direct reading of power factor of electrolytic condensers
Resistance Ranges: 2 ranges .....	100 ohms to 50,000 ohms 10,000 ohms to 5 megohms
Power Requirements:.....	200-250v AC; 40-60 cycles; 30 watts
Circuit:.....	AC powered bridge for both capacitive and resistive measurements. Maximum opening of electron beam indicator denotes bridge balance. Dual sensitivity for accurate adjustment
Cabinet size:.....	9½" wide x 6½" high x 5" deep
Kit Shipping Weight:.....	7 lbs.

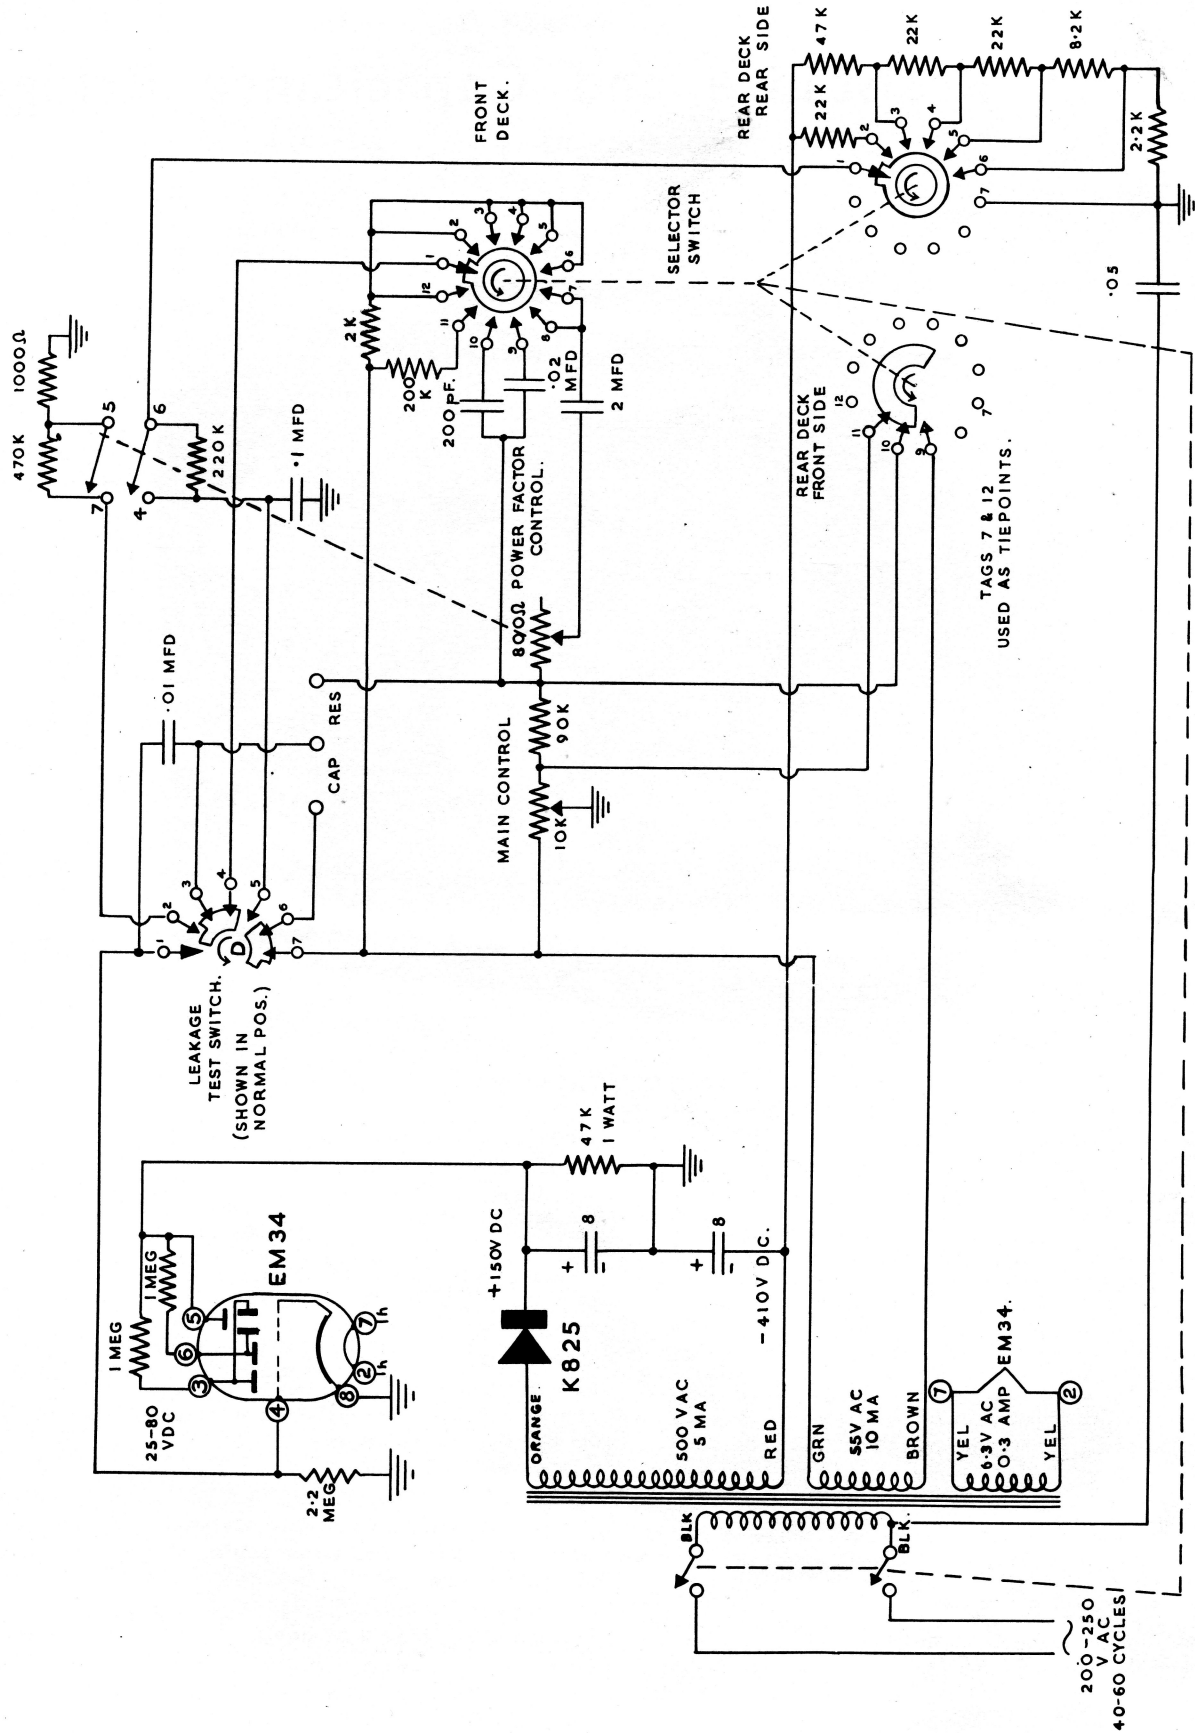

# Heathkit Resistance and Capacitance Bridge

MODEL C-3U